172 Main Street, Fortuna, CA 95540-1816 Phone: 800-522-8863 Fax: 707-725-9060

Website: ccrane.com E-mail: CustomerService@ccrane.com

WHIP ANTENNA REPLACEMENT INSTRUCTIONS FOR ALL CC SKYWAVE RADIOS

Please follow the steps below to replace the whip antenna:

1. **REMOVE OLD ANTENNA:** Looking at the back of the radio, you will see a small silver Phillips screw at the Pivot Point*. Carefully remove this single screw, and lift out the old antenna.

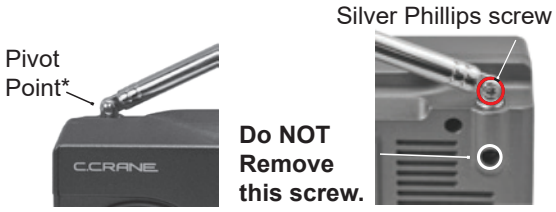

2. **PREPARE NEW ANTENNA:** NOTE: The new replacement antenna will have a base** attached to the bottom with a small Phillips-head screw (See Fig. 1). This base part will not be used in the antenna replacement. (It is connected inside the radio and the end-user should never attempt to replace this part). You will only be replacing the top, telescoping part of the antenna. **Do <u>not</u> attempt to open the radio as this will VOID your Warranty.** Remove the small screw at the junction of the new antenna, to separate the base from the rest of the antenna. (Again, you will not be using this base part).

3. **POSITION THE NEW ANTENNA:** Slide the flat end of the new antenna (with the screw hole), (See Fig. 2 below) into the slot and then insert the screw and tighten. **Do not over tighten.** This completes the antenna replacement.



Fig. 1



Fig. 2



Fig. 3

If you have any questions or need technical assistance, please call our Tech Department at 1-800-522-8863, Monday through Friday between 8:15AM to 5:00PM PT. Closed for lunch 12:00 PM to 1:00 PM.

Note: Opening the radio case will void your warranty.

Copyright © 2025 C. Crane All Rights Reserved